
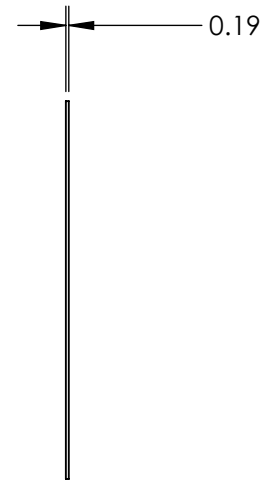
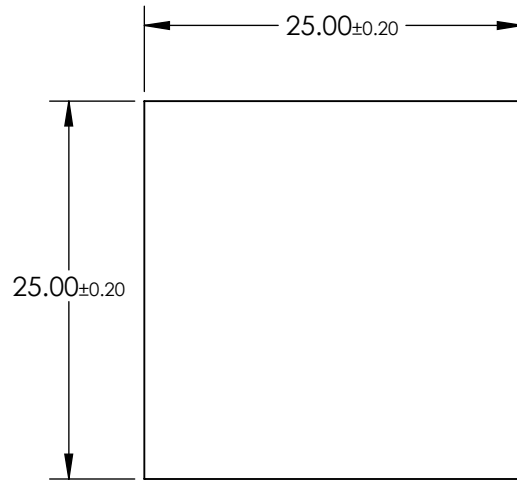


NOTES:


1. SUBSTRATE: CTA (Cellulose Triacetate)
2. OPERATING TEMPERATURE: -20 TO +70 °C
3. WAVELENGTH RANGE: 320 - 750NM
4. COATING: UNCOATED
5. TRANSMISSION (%)
 - SINGLE: 39 (325nm-400nm)
 - CROSSED: 0.04 (325nm-400nm)
6. ROHS COMPLIANT

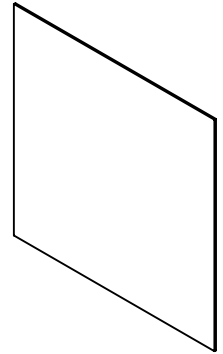

SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE
 DIMENSIONS ARE FOR REFERENCE ONLY

**FOR INFORMATION ONLY:
 DO NOT MANUFACTURE
 PARTS TO THIS DRAWING**

EO[®] Edmund Optics[®]

THIRD ANGLE PROJECTION 		TITLE	25 x 25mm UV Polarizing Film	
ALL DIMS IN	mm	DWG NO	25111	SHEET 1 OF 1